

# FLOS

F9512034 White Cable/Pink Ring

## Wirering White

Designed by Formafantasma, 2018


16W - 712lm - 2700K - CRI> 90



Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                   |                     |
|-------------------|---------------------|
| EAN               | 8059607007600       |
| Mounting          | Wall                |
| Environments      | Indoor dry location |
| Light Source Type | LED                 |
| LED type          | LED Module          |
| Power (W)         | 16                  |
| System flux (lm)  | 712                 |

### Physical

|                     |                       |
|---------------------|-----------------------|
| Colour              | White Cable/Pink Ring |
| Length (mm)         | 317                   |
| Cord length (mm)    | 2500                  |
| Net weight (kg)     | 0.95                  |
| Package volume (m3) | 0.02                  |
| IP internal         | 20                    |

### Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

### Photometric Files

[LDT / IES](#) LDT


### Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



## Schematic light drawing



## Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Indirect   |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |

## Electrical

|                    |                        |
|--------------------|------------------------|
| Insulation class   | III                    |
| Frequency (Hz)     | 50/60                  |
| Main voltage (Vac) | 100-240/24             |
| Driver             | Remote included        |
| Dimmable           | Yes                    |
| Dimming type       | Electronic 24V         |
| Dimming interface  | Dimmer Integrated      |
| Plug type          | Type G, Type A, Type C |
| Batteries inside   | No                     |
| Charging min time  | No                     |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by an end-user

## Spare Parts

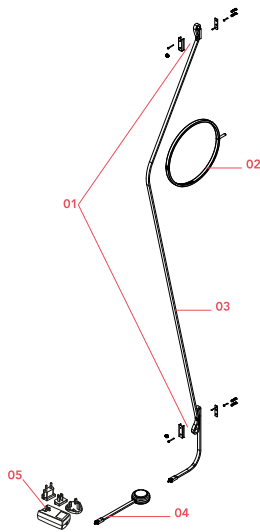


- |     |                                      |           |
|-----|--------------------------------------|-----------|
| 01. | Kit with screws, nuts and components | RF9510300 |
| 02. | Ring assembly                        | RF26676   |
| 03. | Electrical mounting body assembly    | RF26650   |
| 04. | Electrical mounting body assembly    | RF26644   |
| 05. | Black plug assembly kit & 24V driver | RF3320100 |

**DOWNLOAD**



RF9510300  
Kit with screws, nuts and components



RF26676  
Ring assembly



RF26650  
Electrical mounting body assembly



RF26644  
Electrical mounting body assembly



RF3320100  
Black plug assembly kit & 24V driver